


## **Configuring Xnet on Demand DSL600EU ADSL2+ Ethernet USB Router** **(WINDOWS XP ONLY)**

Your Username: .....@cwnet.lc

Your Password: .....

### **USB Connection**

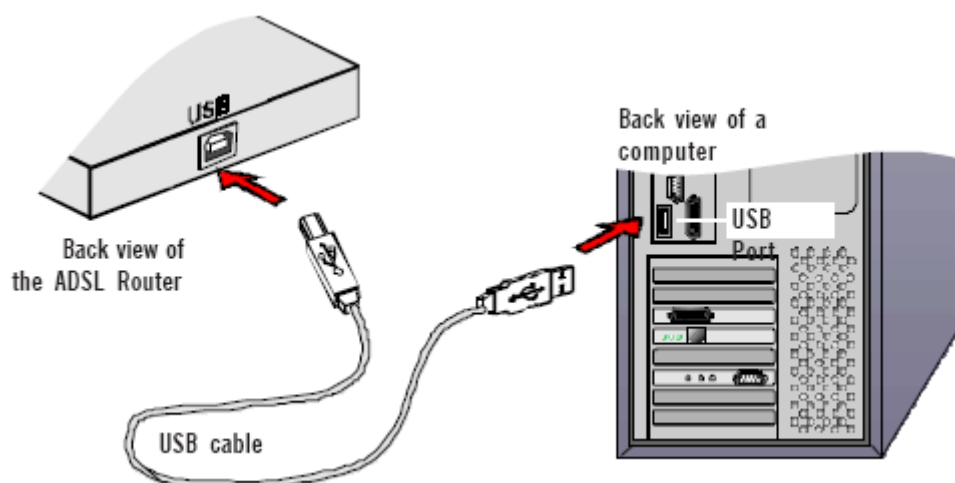

- Connect one end of the USB cable to the USB port on the modem and the other end to the USB port on the computer. See diagram above.
- Connect the Telephone jack to your Telephone Wall Socket (ADSL Line)
- Connect the Power Adapter that comes with your modem to the DC 9V port at the back of the modem.
- Power on your computer

### **Installing USB drivers**

- Refer to pages 11 – 17 of the Easy Start booklet for instructions on installing USB drivers for your Windows operating system

### **Configuring the Modem**

- From your internet Browser type <http://192.168.1.1> at the address bar and hit **<Enter>**

- Enter **admin** for the username and **admin** for the password and click **ok**.
- Click **Setup** and click **Connection 0**
- Under Type select **Bridge**.
- Enter the following options:  
*Encap – LLC*  
*VPI – 0*  
*VCI – 35*
- Click **Apply** and click **Save settings**
- Click **DHCP Configuration**
- Select **Server & Relay off**
- Click **Apply** and Click **Save Settings**

### Configuring your Windows XP Dialer

- Click **Start**, click **Control Panel**, click **Network and Internet Connections**, and then click **Network Connections**. (If you're using Classic view click Start, and click Control Panel, and then double-click Network Connections).
- Under **Network Tasks**, click **Create a new connection**, and then click **Next**.
- Click **Connect to the Internet**, and then click **Next**.
- Click **Set up my connection manually**, and then click **Next**.
- Click **Connect using a broadband connection that requires a user name and password**.
- In the **Connection Name** dialog box, type **Cable & Wireless**. This becomes the name of the connection. Click **Next**.

In the **Internet Account Information** dialog box type your **Username** and **Password**.

- Additional checkboxes allow you to specify whether this connection and its user name and password is available to all users (selected by default), whether this connection is your default Internet connection (selected by default), and whether to enable the Internet Connection Firewall on the connection (enabled by default). Make the appropriate selections, and then click **Next**.
- In the **Completing the Connection Wizard dialog box**, review the settings. If you need to modify any of them, click **Back** as many times as necessary. If all the settings are correct, click **Finish**.
- In the **Connect** dialog box, click **Connect** to attempt the connection.