


Print this Page

## Internet Setup for Windows NT


### Configuring Remote Access Service (RAS)

1. Click **Start, Settings**, and choose **Control Panel**.
2. Double Click **Network** and click on the **Services** tab.
3. Click on the **Add** button, and then select **Remote Access Services** from the list (you may need to scroll down to locate it.)

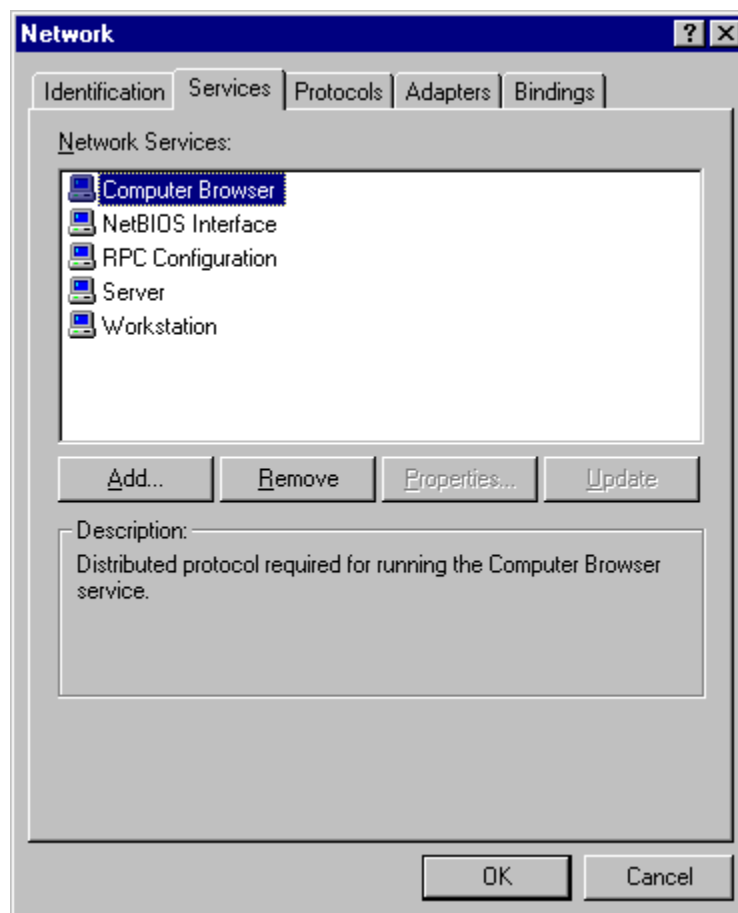

(After you **OK** your selection, files will be copied from the **\\i386** directory on your hard drive or your Windows NT Workstation 4.0 CD-ROM. Once done, you will be prompted to install your modem if you have not already done so.)

Next the following screen appears. Select the **COM** port for your modem, and click **OK**.

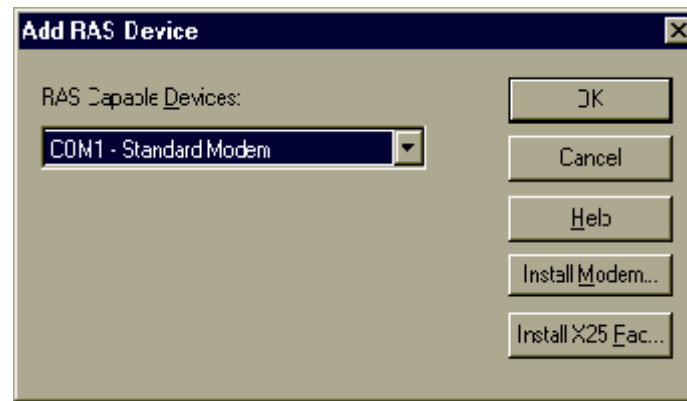


From the **Remote Access Setup** window shown below, click on **Continue**. You will be returned to the **Services** tab. **Remote Access Services** is now added to the list of Services. Click **OK** and the files for Dial-Up Networking will be installed. Select **YES** to restart your computer for the changes to take effect.


### Configuring your dialer for Internet connection.

Now that Remote Access Service and Dial-Up Networking are installed, configure your Computer for dialing to the Internet by following these steps:


Double click **My Computer** from the desktop **then** double click **Dial-Up Networking**. The first time it is started, the **New Phonebook Entry Wizard** will be opened to help configure the phonebook entry for Internet access. Type in **Cable&Wireless** as the name of the entry and click **next**.

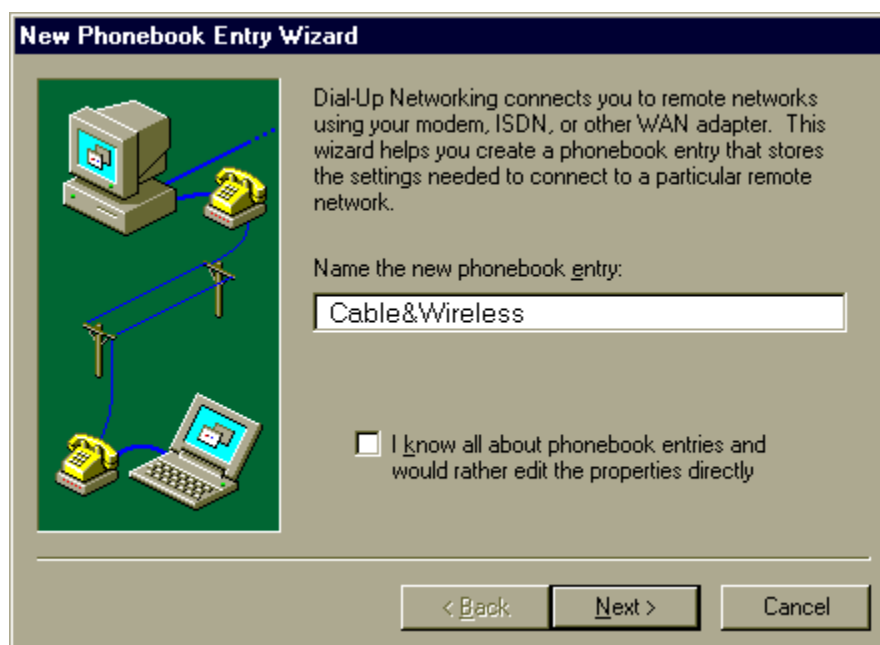


In the **Server** window, select **I am calling the Internet**, then click **Next**

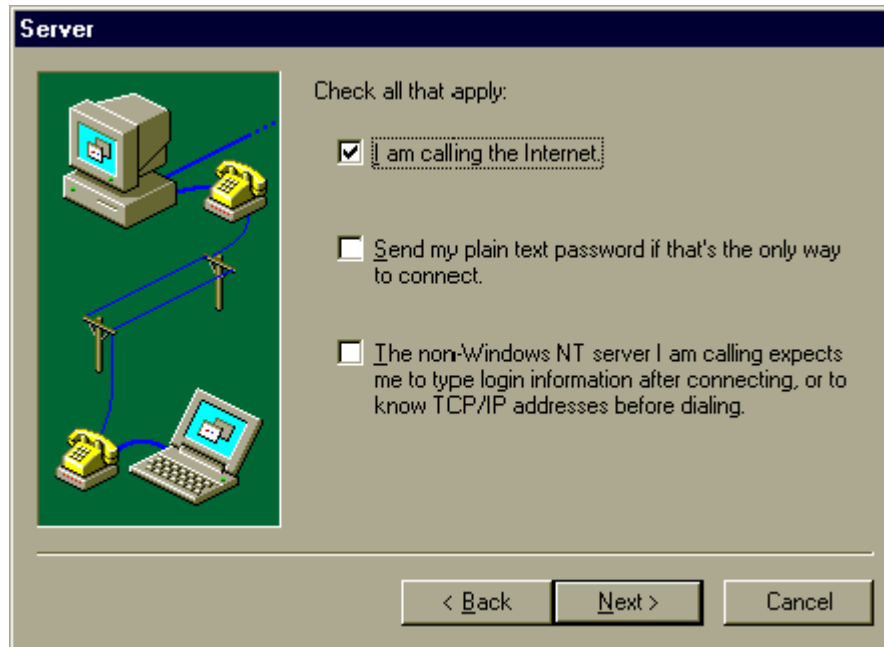


In the **Phone Number** window, type **1 900 468 3763** then click **Next** and click **Finish** to complete this part of your dialer setup.

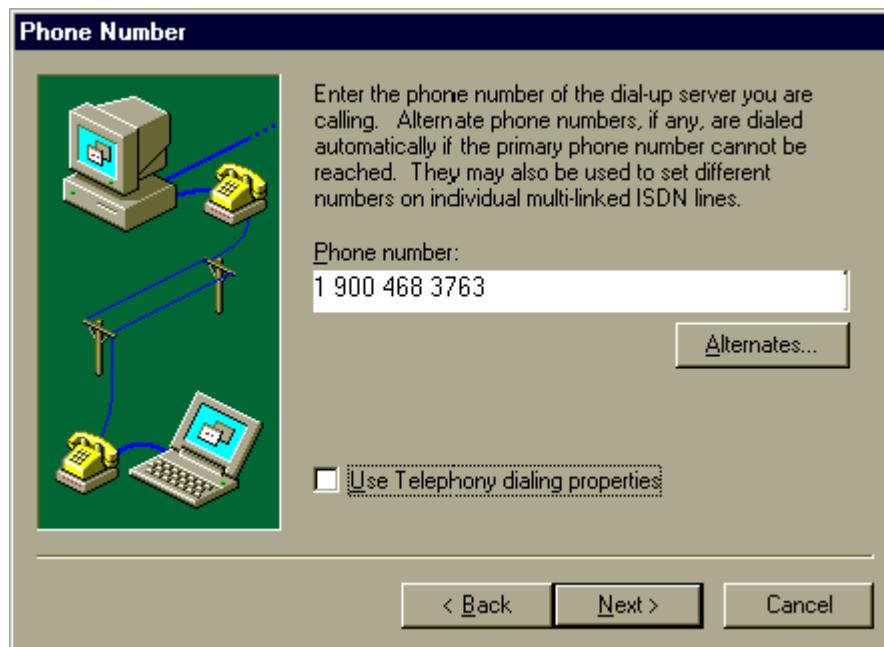

Click on **More** and then select **Edit entry and modem properties** from the drop down menu.

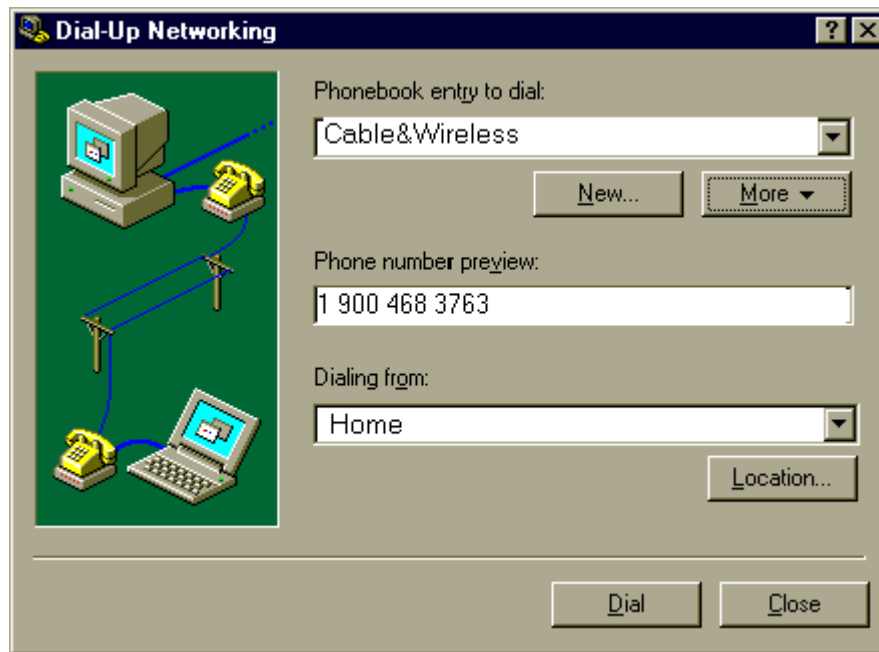


In the **Edit Phonebook Entry** window, click on the **Server** tab to display the window below. Set the **Dial-Up server type:** to **PPP: Windows NT, Windows 95 Plus, Internet**, and check **TCP/IP**.

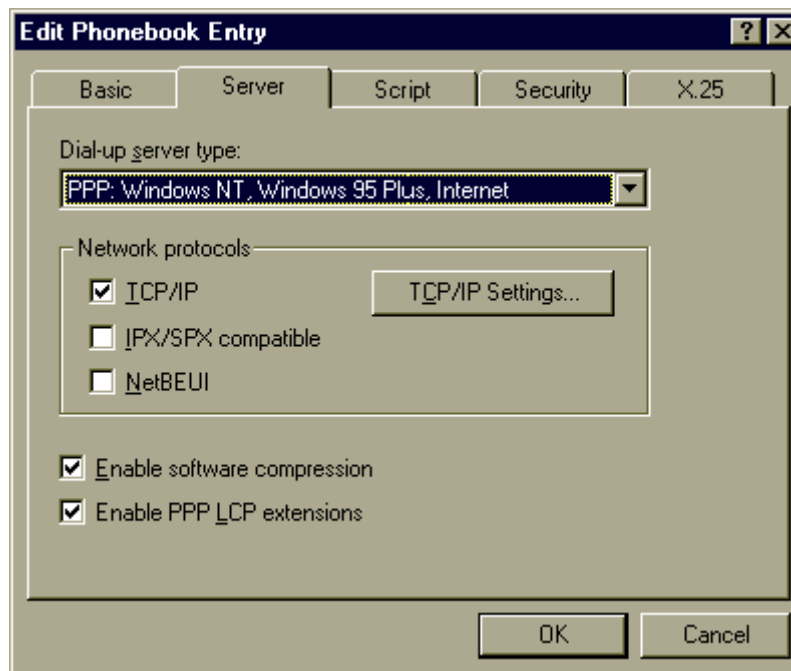

Click the **TCP/IP Settings** button. In the **PPP TCP/IP Settings** window, select the **Server assigned IP address** and **Server assigned name server addresses**. Also **Uncheck** the **Use IP header compression** and **CHECK** the **Use default gateway on server option**. Click on **OK** to return to the **Edit Phonebook Entry** window, and click **OK** again to return to the **Dial-Up networking** window. Close the window and restart your Computer to ensure

that all of the settings take effect.

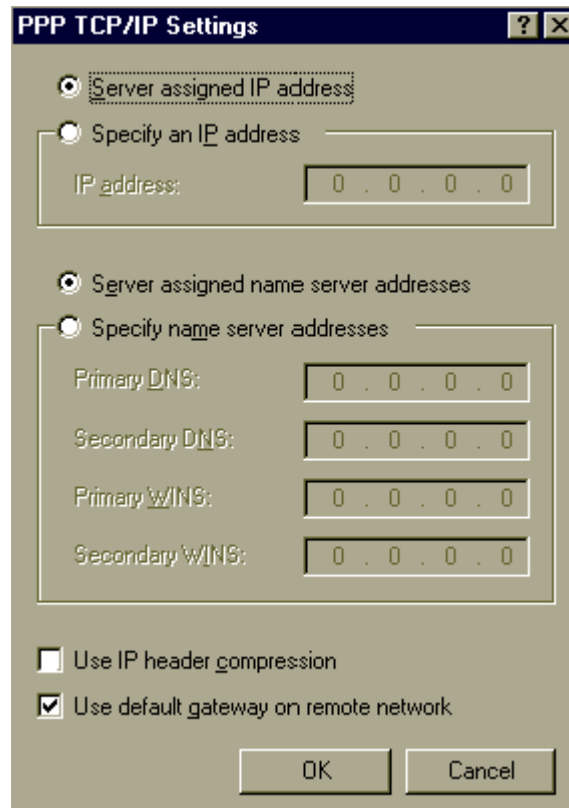

### [Starting a Connection to the Internet](#)

**Double click Dial-Up Networking**, and then click on the **Dial** button to initiate the dial-up process.. You must enter your **Username** and **Password**. Once entered, click on **OK** to dial. Note that the **Domain** field remains blank as shown in the diagram below. You should now hear the modem initializing, dialing, and connecting to the Internet. This concludes the instructions on how to setup your Windows NT workstation 4.0 to access the Internet.

**Connect to UCSF-RAS** [?] [X]

Enter a user name and password with access to the remote network domain.

User name:

Password:

Domain:

Save password